


Overview


HPE ProLiant DL20 Generation9 (Gen9)

The dense and compact HPE ProLiant DL20 Gen9 Server powered by Intel Pentium, Core i3 and E3-1200v5 processors provides a unique blend of enterprise class capabilities & value. It offers outstanding configuration flexibility to cater to a wide variety of business requirements at an affordable price point.

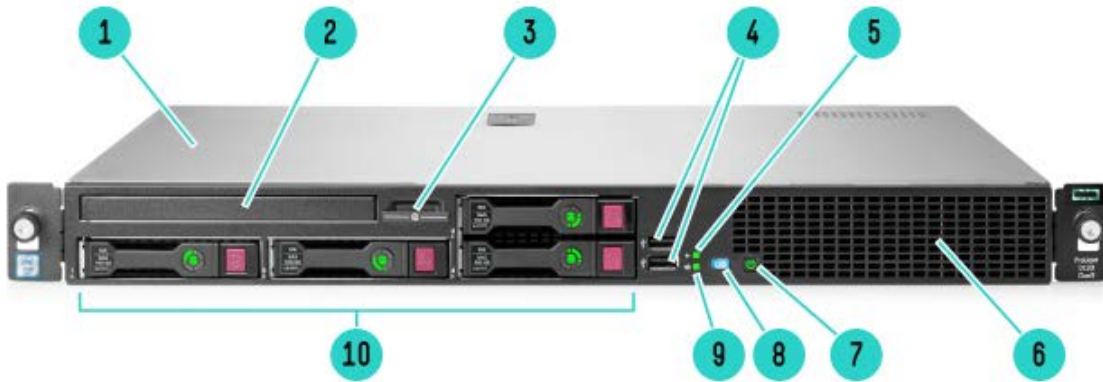

Front View


- | | |
|---|--|
| 1. Access Panel | 5. Health LED |
| 3. Serial number/iLO information pull tab | 7. Power On/Standby button and system power LED button |
| 4. 2 USB 2.0 connectors | 9. NIC status LED |
| 6. Front 2 Fan Assembly | |
| 8. UID LED | |
| 10. Hard Drive Bays | |

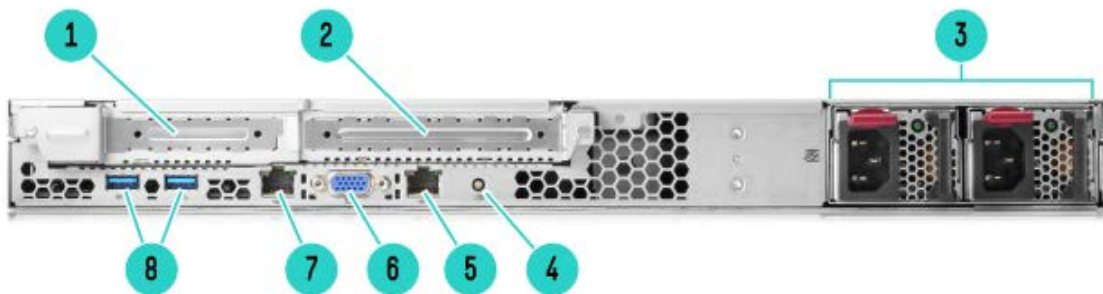

Rear View

- | | |
|---|------------------------------|
| 1. Expansion Slot 1, PCIe x 8 | 5. NIC Connector 2 |
| 3. Redundant Power Supply (only on SFF Chassis) | 7. NIC1/shared iLO connector |
| 4. UID LED | |
| 6. Video Connector | |
| 8. USB 3.0 Connector | |

Overview

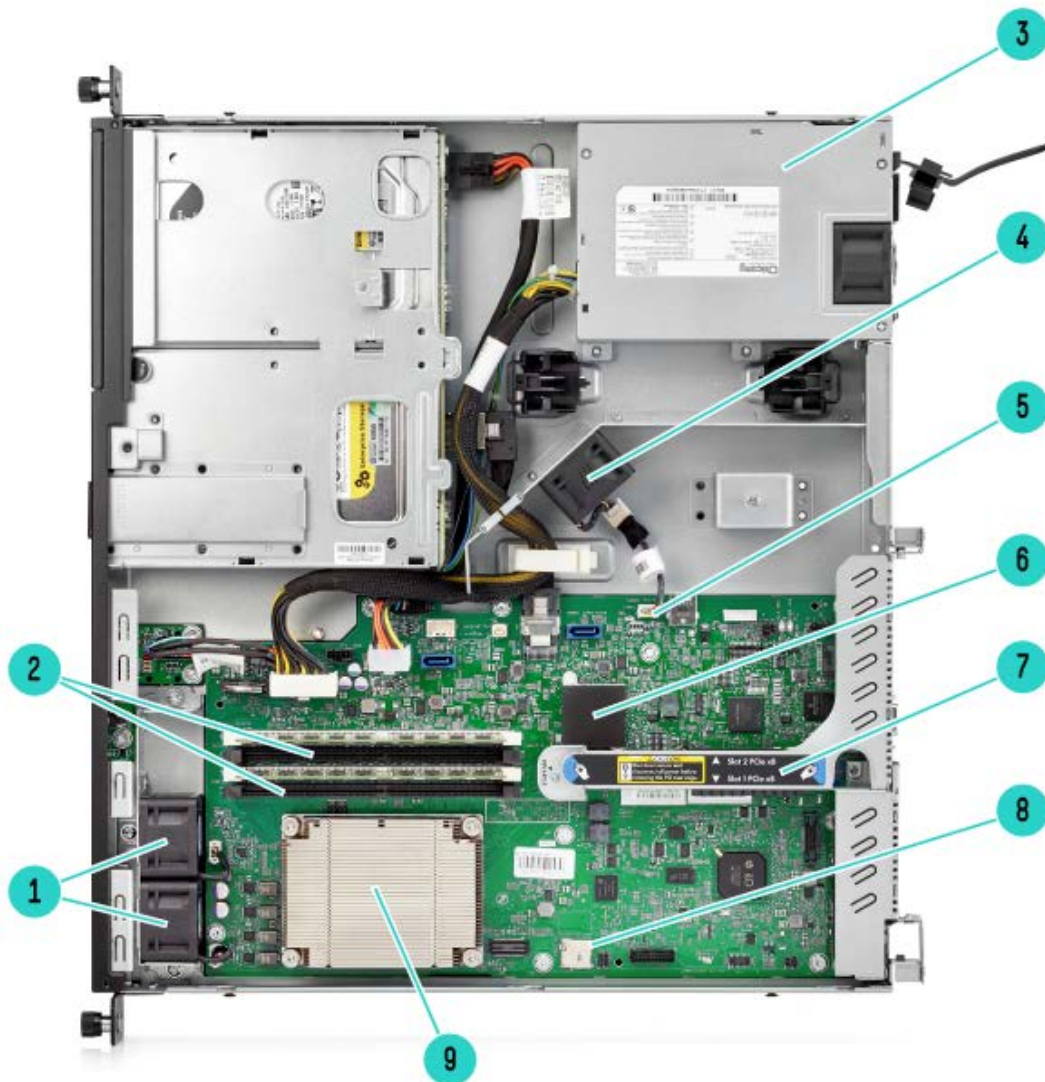

Internal View

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. Fan cage shown with 2 fans 3. (Under) Power supply (1x 290W power supply shown) 5. Internal USB 3.0 connector 7. PCIe Riser 9. 1 Processor, heatsink showing, with HP Smart Socket Guide | <ol style="list-style-type: none"> 2. DDR4 DIMM slots. 4 slots 4. Central Fan Assembly 6. Embedded HPE Smart Array B140i controller 8. MicroSD card slot |
|---|--|

What's New

- New Intel Pentium Core i3 and E3-1200v6 processors
- Introducing NVIDIA Quadro M2000 GPU support
- New 2400 MT/s UDIMM
- Support for ClearOS – an easy to use OS with an application marketplace

Standard Features

NOTE: For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Intel® Xeon® processor E3-1200v5 quad core processor family is designed to deliver the best combination of performance, built-in capabilities, and cost-effectiveness. The product also supports Intel® Pentium® and Intel® Core-i3 dual core processors. Choose one of the following processors based on the model:

Processor

One of the following depending on model

Model	CPU frequency	Cores	L3 Cache	Power	DDR4 Hz
G4400	3.3GHz	2	3MB	54W	2133
G4500	3.5GHz	2	3MB	51W	2133
i3-6100	3.7GHz	2	3MB	51W	2133
i3-6300	3.8GHz	2	4MB	51W	2133
E3-1220v5	3.0GHz	4	8MB	80W	2133
E3-1225v5	3.3GHz	4	8MB	80W	2133
E3-1230v5	3.4GHz	4	8MB	80W	2133
E3-1240v5	3.5GHz	4	8MB	80W	2133
E3-1270v5	3.6GHz	4	8MB	80W	2133
E3-1280v5	3.7GHz	4	8MB	80W	2133
E3-1240Lv5	2.1GHz	4	8MB	25W	2133
E3-1260Lv5	2.9GHz	4	8MB	45W	2133
G4560	3.5GHz	2	3MB	54W	2400
G4600	3.6GHz	2	3MB	51W	2400
i3-7100	3.9GHz	2	3MB	51W	2400
i3-7300	4.0GHz	2	3MB	51W	2400
E3-1220v6	3.0GHz	4	8MB	72W	2400
E3-1225v6	3.3GHz	4	8MB	73W	2400
E3-1230v6	3.5GHz	4	8MB	72W	2400
E3-1240v6	3.7GHz	4	8MB	72W	2400
E3-1270v6	3.8GHz	4	8MB	72W	2400
E3-1280v6	3.9GHz	4	8MB	72W	2400

Chipset

Intel® C232 Chipset

NOTE: For more information regarding Intel® chipsets, please see the following URL: <http://www.intel.com/products/server/chipsets/>

On System

HPE iLO (Firmware HPE iLO4 2.3) 4GB NAND

Management Chipset

NOTE: 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the [iLO QuickSpecs](#).

Memory

One of the following depending on model

Type:

DDR4 Unbuffered (UDIMM)

Unbuffered (UDIMM)

DIMM Slots Available

4

4 DIMM slots per processor; 2 channels per processor, 2 DIMMs per channel

Maximum Capacity (UDIMM)

64GB

(4 x 16GB UDIMM @2400MHz)

Memory Protection

ECC

Standard Features

Network Controller HPE Ethernet 1Gb 2-port 332i network Adapter or BCM5720.

The HPE ProLiant DL20 Gen9 server offers the customer a dual-port NIC standard with the option to upgrade with a variety of networking options.

Expansion Slots

Dual side Low profile riser

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
1	PCIe 3.0	X8	X8		Half length/half height	
2	PCIe 3.0	X8	X8		Half length/full height	

NOTE: Bus Width data indicates the number of physical electrical lanes running to the connector.

FlexibleLOM Riser

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
1	Flexible LOM	x8	x8		Half length/half height	
2	PCIe 3.0	x8	x8		Half length/full height	

NOTE: This riser is mandatory for installing FlexibleLOMs.

GPU Riser

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
1						
2	PCIe 3.0	x16	x16		Half length/full height	

NOTE: It is mandatory to choose one of the above risers.

Storage Controller

One of the following depending on model

Entry Models	HPE Dynamic Smart Array B140i Controller
Base Models	HPE Dynamic Smart Array B140i Controller
Performance Models	HPE H240 FIO Smart Host Bus Adapter

NOTE: B140i provides support for up to 4 SATA drives, data transmission speeds up to 6Gb/s and supports RAID 0, 1 & 5 on DL20 Gen9.

NOTE: H240 provides support for up to 4 SAS/SATA drives, data transmission speeds up to 12Gb/s and supports RAID 0, 1 & 5 on DL20 Gen9.

NOTE: DL20 Gen9 also supports other controller options like P440; read additional option to know more.

Internal Storage Devices

One of the following depending on model

Optical Drive	Ships standard in Performance Models Optional: DVD-ROM, DVD-RW
Optical Drives	Optional: DVD-ROM, DVD-RW
Hard Drives	None ship standard
Hard Drive Bays	4 SFF drive bays total with Optical Bay 2 LFF drive bays total with Optical Bay

NOTE: HPE ProLiant DL20 Gen9 server offers Hot plug LFF, Non hot plug LFF

Standard Features

and SFF versions in CTO. The Optical Drive bay is available with both models.

NOTE: Drive cage changes are not supported.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 654961-B21: HPE SFF Gen9 Hard Drive Blank Kit or P/N 689745-B21: HPE LFF Gen9 Hard Drive Blank Kit or P/N 654963-B21: HPE LFF Gen9 Hard Drive Blank kit. These part numbers for single HDD blanks below are also provided should the customer require replacement HDD blanks for their server.

Maximum Internal Storage

	CAPACITY	CONFIGURATION
Hot Plug SFF SAS	8TB	4 x 2TB
Hot Plug SFF SATA	8TB	4 x 2TB
Hot Plug LFF SAS	20TB	2 x 10TB
Hot Plug LFF SATA	20TB	2 x 10TB
Hot Plug SFF SAS SSD	15.36TB	4 x 3.84TB
Hot Plug SFF SATA SSD	15.36TB	4 x 3.84TB
Hot Plug LFF SATA SSD	15.36TB	4 x 3.84TB
Non Hot Plug LFF SATA	8TB	2 x 4TB

Power Supply

One of the following depending on model

HPE 290W FIO Power Supply

HPE 900W AC 240V DC Redundant Power Supply

NOTE: HPE 900W Redundant Power Supply supports 100VAC to 240VAC and also supports 240VDC.

HPE Entry-Level Power Supplies provide lower-cost options for customers trying to balance their need for enterprise class efficiency and reliability while maintaining lowest possible hardware costs. The above mentioned Entry-Level power supply options have been designed specifically for HPE ProLiant DL20 Gen9 Server.

The HPE 290W FIO Power Supply is the standard, non-redundant AC power supply with 80Plus Silver Certification. It features 92% power efficiency with a set of features optimized for the DL20 Gen9 rack server.

The HPE 900W Gold (Redundant) AC/240V DC Power Input Module with Power Backplane can be configured to support power redundancy in ProLiant servers that offer only a single power supply bay, providing additional protection against power loss. With an 80 Plus Gold power efficiency rating (up to 92%), this power option helps to reduce operating expenses while protecting against trapped power capacity in the data center. The power backplane option can support up to two (2) hot-plug AC power input modules. This Redundant power supply option is only supported on DL20 Gen9 SFF chassis model.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit.

To review the power requirements for your selected system, please use the HPE Power Advisor Tool located at <http://www.hpe.com/info/hppoweradvisor>.

System Fans

One of the following depending on model

1P model

Non-redundant

3 fans

Redundant

NA

NOTE: DL20 has 3 fans, 2 front fan assemblies and 1 center fan assembly which ship standard, non-redundant.

Interfaces

Video

1 rear video connector

USB

5 USB ports (standard)

Standard Features

	Front: 2xUSB 2.0
	Rear: 2xUSB 3.0
	Internal: 1x USB 3.0
Micro SD Slot	1 Micro SD

NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.

LOM Network Ports	2x1GbE ports
-------------------	--------------

NOTE: Customers can upgrade to next generation network (10 GbE) by installing a FlexibleLOM riser.

Operating Systems and Virtualization Software Support for ProLiant Servers

Microsoft Windows Server

Red Hat Enterprise Linux (RHEL)

SUSE Linux Enterprise Server (SLES)

VMware

ClearOS

NOTE: VMWare availability is dependent on General availability from the vendor. DL20 supports VMWare 5.5U3 and 6.0 U1.

NOTE: ClearOS allows you to build a fully functional server that is just right for you at no upfront cost. It is available via CTO preload, Intelligent Provisioning or via download. For more information on ClearOS, please visit <http://www.hpe.com/servers/clearos>.

NOTE: For more information on the Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/ossupport> and our [driver download page](#)

Upgradeability

One of the following depending on model

FlexibleLOM connector for 1 Gigabit or 10 Gigabit networking options

Up to 4 DIMM slots available for higher memory capacity

Up to 4SFF Drive bays or 2LFF Drive bays

HPE Smart Array or Smart HBA Controller

Redundant Power Supply

NOTE: RPS is only compatible with DL20 SFF Chassis. Customer can upgrade from DL20 Gen9 on SFF chassis with 290W PSU to 900W redundant power supply.

Industry Standard Compliance

UEFI (Unified Extensible Firmware Interface Forum)

PCIe 3.0 Compliant

PXE Support

WOL Support

Microsoft® Logo certifications

USB 3.0 Support

ASHRAE A3

NOTE: Refer to technical specifications section for more details.

Graphics

Integrated Matrox G200 video standard

On board graphics: Integrated Matrox G200 video standard

- 1280 x 1024 (32 bpp)

- 1920 x 1200 (16 bpp)

HP iLO 4 On System Management Memory

- 16 MB Flash

- 256 MB DDR 3 with ECC (112 MB after ECC and video)

HPE NVIDIA Quadro M2000 GPU Module

Standard Features

NOTE: Install GPU riser option to support GPU card. A GPU enablement kit 811271-B21 is mandatory to support GPU.

HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

NOTE: The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using RESTful API for iLO 4
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM
- Network Stack configurations

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen9 Server.

Form Factor

One of the following depending on model

1U Rack form factor

4SFF and 2LFF version:

1.70" (4.32cm) Height x 15.05" (38.22cm) Depth x 17.11" (43.46cm) Length

NOTE: Depth of the chassis is measured from rear to ear at 15.05". Depth from rear to bezel is 15.5".

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>.

RESTful API

RESTful API for iLO 4 is Redfish 1.0 conformance for simplified server management such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

Intelligent Provisioning

Hassle free server and OS provisioning for 1 or few servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

Standard Features

Embedded Remote Support The Hewlett Packard **Enterprise** embedded remote support, when used with Insight Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to Hewlett Packard Enterprise or a Hewlett Packard Enterprise Authorized Partner for automated phone home support. Learn more at <http://www.hpe.com/info/insightonline/explore>.

Server utilities

Smart Update Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP). Learn more at <http://www.hpe.com/servers/smartupdatemanager>.

HPE Systems Insight Manager (HPE SIM) HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/servers/hpsim>.

Scripting Tool Kit and Windows PowerShell Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/proliant/stk> or <http://www.hpe.com/servers/powershell>.

RESTful Interface Tool RESTful Interface tool is a scripting tool to provision using RESTful API for iLO 4 to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

HPE iLO Mobile Application Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

HPE Insight Online HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <http://www.hpe.com/info/insightonline/explore>.

Security

Power-on password
Serial interface control
Administrator's password
UEFI
TPM 1.2
TPM 2.0
APCI 2.0b

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A

Standard Features

travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

Optional Features

Embedded Management	iLO Essentials	HPE iLO Essentials is the preferred license for small and medium business that offers full remote server management capabilities for small and medium business via the Integrated Remote Console (IRC), virtual media, and e-mail based alerts. Learn more about HPE iLO Essentials at http://www.hpe.com/servers/iLO/essentials .
	iLO Scale-Out	HPE iLO Scale-Out is the preferred license built for web hosting, cloud service providers, and high performance computing data centers, managing massive scale out environments for the DL 100 and 10 series servers, not available for ML servers. This license offers sophisticated scripting tools that provides remote access through Text Console via SSH, Dynamic power capping, Email-based Alerting and proactive notifications. For more information, visit http://www.hpe.com/servers/iLO/scale-out .
	iLO Advanced	HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at http://www.hpe.com/servers/ioloadvanced .
Server Management	HPE Insight Control	HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hpe.com/info/insightcontrol .
Rack and Power Infrastructure	HPE Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HPE Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access. Learn more at HPE Rack and Power Infrastructure .	
High Performance Clusters	HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPEC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters .	
HPC Interconnects	NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand Interconnects: http://www.hp.com/techservers/clusters/ucp/index.html .	
Storage Software	Whether you're a large enterprise or a smaller business, Hewlett Packard Enterprise data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.	

Optional Features

ClearOS

HPE and ClearCenter will help you lower the cost of building on-premise solutions without sacrificing security and ease of use. HPE ProLiant servers with ClearOS give you a simple, secure, and affordable operating system with an intuitive web based graphical user interface that provides a cloud-like experience on- premise, and an Application Marketplace with over 100 apps and growing. Whether you're starting out or scaling, you decide what applications you need and pay as you grow.

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <http://ocs.ext.hpe.com/>.

Service and Support

HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business.

Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%¹ reduction in down time, near 100%² diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

1- IDC 2 - HPE CSC reports 2014 - 2015

Recommended Support

Basic: HPE Foundation Care NBD, three-year Support Service

HPE Foundation Care Next Business Day connects you to Hewlett Packard Enterprise during business hours for assistance on resolving issues – This service features need based next business day hardware onsite response and software call back within two hours. In addition, Collaborative software support and provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

Standard: HPE Foundation Care 24x7, three-year Support Service

HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

Optimized: HPE Proactive Care* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

Parts and Materials

Hewlett Packard Enterprise will provide Hewlett Packard Enterprise-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices

Service and Support

and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

HPE Installation and Startup Service

Provides for the installation and startup of Hewlett Packard Enterprise technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

HPE Technology Services Support Credits

Offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

<http://www.hpe.com/ww/learn>

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>

The Hewlett Packard Enterprise Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Support Service or Hewlett Packard Enterprise contractual support agreement.

*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>

Pre-configured Models

	Entry Models		Base Models	
[SKU Number]	829889-B21	871428-B21	823556-B21	871429-B21
Model Name	HPE ProLiant DL20 Gen9 G4400 4GB-U Non-hot Plug 2LFF 290W PS Entry Server	HPE ProLiant DL20 Gen9 G4560 8GB-U Non-hot Plug 2LFF 290W PS Entry Server	HPE ProLiant DL20 Gen9 E3-1220v5 8GB-U B140i 2LFF 290W PS Base Server	HPE ProLiant DL20 Gen9 E3-1220v6 8GB-U B140i 2LFF 290W PS Base Server
Processor	Intel® Pentium® G4400	Intel® Pentium® G4560	Intel® Xeon® E3-1220v5	Intel® Xeon® E3-1220v6
Number of Processors	One			
Memory	4GB (1x4GB UDIMMs, 2133 MHz)	8GB (1x8GB UDIMM, 2400 MHz)	8GB (1x8GB UDIMMs, 2133 MHz)	8GB (1x8GB UDIMM, 2400 MHz)
Network Controller	HPE embedded 1Gb 2-port 332i network Adapter			
Storage Controller	HPE Dynamic Smart Array B140i			
Hard Drive	None ship standard; includes 2 LFF hard drive blanks		None ship standard	
Internal Storage	2 LFF HDD Bays (Non Hot Plug)		2 LFF HDD Bays (Hot Plug)	
Optical Drive Bay	1; (Optional: DVD-ROM, DVD-RW)			
Optical Drive	None			
PCI-Express Slots	2 PCIe 3.0 slots			
Power Supply	(1) 290W Non Hot Plug Power Supply			
Fans	3 non hot plug, non-redundant			
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)			
Form Factor	Rack (1U), HPE Short Friction Rail Kit			
Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response			

Pre-configured Models

	Performance Models			
[SKU Number]	823559-B21	823562-B21	871430-B21	871431-B21
Model Name	HPE ProLiant DL20 Gen9 E3-1240v5 8GB-U H240 4SFF 290W PS Performance Server	HPE ProLiant DL20 Gen9 E3-1240v5 8GB-U H240 4SFF 900W RPS Performance Server	HPE ProLiant DL20 Gen9 E3-1240v6 16GB-U H240 4SFF 290W PS Performance Server	HPE ProLiant DL20 Gen9 E3-1240v6 8GB-U H240 4SFF 900W RPS Performance Server
Processor	Intel® Xeon® E3-1240v5		Intel® Xeon® E3-1240v6	
Number of Processors	One			
Memory	8GB (1x8GB UDIMMs, 2133 MHz)		16GB (1x16GB UDIMMs, 2400 MHz)	
Network Controller	HPE embedded 1Gb 2-port 332i network Adapter			
Storage Controller	HPE H240 Smart Host Bus Adapter			
Hard Drive	None ship standard			
Internal Storage	4 SFF HDD Bays			
Optical Drive Bay	1; (Optional: DVD-ROM, DVD-RW)			
Optical Drive	None			
PCI-Express Slots	2 PCIe 3.0 slots			
Power Supply	(1) 290W Non Hot Plug Power Supply	(1) HPE 900W Redundant Power Supply and RPS Backplane kit	(1) 290W Non Hot Plug Power Supply	(1) HPE 900W Redundant Power Supply and RPS Backplane kit
Fans	3 non hot plug, non-redundant			
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)			
Energy Star		Meets Energy Star requirements		Meets Energy Star requirements
Form Factor	Rack (1U), HPE Short Friction Rail Kit			
Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response			

NOTE: For 823562-B21 Model, add additional 900W Redundant Power supply input module for redundancy. The BTO includes the backplane cable kit and need not be added additionally.

Country Code Key	xx1 = B21	Worldwide
	xx1 = 291	Japan
	xx1 = AA1	PRC

Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

[Chassis]	HPE ProLiant DL20 Gen9 Non-hot Plug 2LFF Configure-to-order Server	HPE ProLiant DL20 Gen9 2LFF Configure-to-order Server	HPE ProLiant DL20 Gen9 4SFF Configure-to-order Server
SKU Number	819784-B21	819785-B21	819786-B21
Processor	1	1	1
DIMM Slots	4 DIMM slots for UDIMM DDR4 Memory		
Storage Controller	HPE Dynamic Smart Array B140i		
PCIe	2 PCIe 3.0 Slots		
Drive Cage	2LFF Non Hot Plug	2LFF Hot Plug	4SFF Hot Plug
Network Controller	HPE embedded 1Gb 2-port 332i network Adapter		
Fans	3 non hot plug, non-redundant		
Management	iLO Management (standard), Intelligent Provisioning (standard)		
USB	2 front, 1 internal, 2 rear		
Ears	HPE Thumbscrew Ears		

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HPE Processors Select one processor from Core Options-Processor section below

- Select one xxxxxx-L21.
- Only one processor supported.
- DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

For the Intel® C232 Chipset E3-1200 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 1200x v#, 1 is the number of CPU, 2 is socket type/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) is the version number.

HPE Memory Select one or more types of memory from Core Options-Memory section below,

- HPE memory from previous generation servers is not qualified or warranted with this HPE ProLiant Server.
- HPE Standard Memory (UDIMM) is required to realize the memory performance improvements and enhanced functionality listed in this document for this HPE ProLiant Server.

Configuration Information - Factory Integrated Models

- With one processor installed, four DIMMs slots are available.
- For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>.
- Depending on the memory configuration and processor model, the memory speed would run at 2133MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://www.hpe.com/go/ddr4config>.

HPE Power Supplies Select power supply from Core Options-Power Supplies section below:

- Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/info/hppoweradvisor>.

On RPS Enablement Kit power options, mixing of power supplies in the same RPS enablement kit is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

- HPE RPS requires both a Redundant backplane kit and an RPS cable kit option for redundancy.

Step 3: Choose Additional Factory Integratable Options

HPE Unique Options Select one or more Unique options from Core Options section below.

- This section may contain FIO options, please see the Unique options section below.
- FIO indicates that this option is only available as a factory installable option.

HPE I/O Expansion Options Select one Riser Kit options from Core Options section below.

- It is mandatory to choose one riser kit option for DL20 Gen9 configurations.
- This section may contain FIO options, please see HPE I/O Expansion Options section below.
- FIO indicates that this option is only available as a factory installable option.

HPE Drives Select one or more drives from Core Options-HPE Drives section below.

- The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.
- Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
- The HPE ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HPE Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove."

HPE FlexibleLOM Select a FlexibleLOM from Core Options-Networking section below.

- Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

Configuration Information - Factory Integrated Models

- Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hpe.com/go/ProLiantNICs>.

HPE Networking

Select a standup NIC adapter from Core Options-Networking section below.

- Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hpe.com/go/ProLiantNICs>.
- These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

HPE Storage Controllers

Select one or more Storage options from Additional Options section below.

- The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.
- This section may contain FIO options, please see HPE Storage Controllers section below.
- FIO indicates that this option is only available as a factory installable option.

HPE Rail Kits

Select one type of rail kit from Additional Options section below.

- Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.
- To assist in the installation of the server into the rack, an optional installation tool is available by contacting your local services representative (p/n 695539-001).
- See Hewlett Packard Enterprise Rack Options in Additional Options section of this QuickSpecs for more rack kit choices.

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Unique Options	HPE DL20 Gen9 2LFF Mini SAS P440 Cable Kit	811279-B21
	NOTE: This cable kit is required to support P440 controller on 2LFF chassis.	
	HPE DL20 Gen9 4SFF Mini SAS P440 Cable Kit	811282-B21
	NOTE: This cable kit is required to support P440 controller on 4SFF chassis.	
	HPE DL20 Gen9 Smart Storage Battery Holder	822451-B21
	NOTE: This holder is required to install the HPE Smart Storage battery (727258-B21) on P440 controller with FBWC (820834-B21, 726821-B21).	
	HPE DL20 Gen9 Redundant Power Supply Backplane Cable Kit	820306-B21
	NOTE: It is mandatory to choose this back plane cable kit to support 828734-B21, 775595-B21 Redundant Power Supply Input Module. This cable kit is required in instances of single or double 900W PSU unit.	
	HPE DL20 Gen9 M.2 RA and Optical Disk Drive Power Cable Kit	816284-B21
	NOTE: This cable kit is required to support M.2 and or ODD.	
HPE DL20 Gen9 Flexible LOM Riser Kit	811259-B21	
NOTE: This option is required to upgrade to next generation networking capabilities like 10GbE.		
HPE DL20 Gen9 PCIe Low Profile Riser FIO Kit	854846-B21	
HPE DL20 Gen9 GPU Enablement Kit	811271-B21	
NOTE: It is mandatory to choose the GPU enablement kit to support qualified GPU card.		

HPE Processors

E3-1200v6 series Processors

HPE DL20 Gen9 Intel® Xeon® E3-1220v6 (3.0GHz/4-core/8MB/72W) FIO Processor Kit	871049-L21
HPE DL20 Gen9 Intel® Xeon® E3-1225v6 (3.3GHz/4-core/8MB/73W) FIO Processor Kit	872140-L21
NOTE: On E3-1225v6 we do not support Intel's embedded graphics capability.	
HPE DL20 Gen9 Intel® Xeon® E3-1230v6 (3.5GHz/4-core/8MB/72W) FIO Processor Kit	871051-L21
HPE DL20 Gen9 Intel® Xeon® E3-1240v6 (3.7GHz/4-core/8MB/72W) FIO Processor Kit	871053-L21
HPE DL20 Gen9 Intel® Xeon® E3-1270v6 (3.8GHz/4-core/8MB/72W) FIO Processor Kit	871055-L21
HPE DL20 Gen9 Intel® Xeon® E3-1280v6 (3.9GHz/4-core/8MB/72W) FIO Processor Kit	871057-L21

E3-1200v5 series Processors

HPE DL20 Gen9 E3-1220v5 (3.0GHz/4-core/8MB/80W) FIO Processor Kit	822425-L21
HPE DL20 Gen9 E3-1225v5 (3.3GHz/4-core/8MB/80W) FIO Processor Kit	836037-L21
NOTE: On E3-1225v5 we do not support Intel's embedded graphics capability.	
HPE DL20 Gen9 E3-1230v5 (3.4GHz/4-core/8MB/80W) FIO Processor Kit	822427-L21
HPE DL20 Gen9 E3-1240v5 (3.5GHz/4-core/8MB/80W) FIO Processor Kit	822429-L21
HPE DL20 Gen9 E3-1270v5 (3.6GHz/4-core/8MB/80W) FIO Processor Kit	822431-L21
HPE DL20 Gen9 E3-1280v5 (3.7GHz/4-core/8MB/80W) FIO Processor Kit	822433-L21

Core Options

HPE DL20 Gen9 E3-1260Lv5 (2.9GHz/4-core/8MB/45W) FIO Processor Kit	822437-L21
HPE DL20 Gen9 E3-1240Lv5 (2.1GHz/4-core/8MB/25W) FIO Processor Kit	822435-L21
Intel® Core i3-7000 series Processors	
HPE DL20 Gen9 Intel® Core™ i3-7100 (3.9GHz/2-core/3MB/51W) FIO Processor Kit	871059-L21
HPE DL20 Gen9 Intel® Core™ i3-6300 (3.8GHz/2-core/4MB/51W) FIO Processor Kit	871061-L21
Intel® Core i3-6000 series Processors	
HPE ProLiant DL20 Gen9 Intel® Core™ i3-6300 (3.8GHz/2-core/3MB/51W) FIO Processor Kit	840012-L21
HPE ProLiant DL20 Gen9 Intel® Core™ i3-6100 (3.7GHz/2-core/3MB/51W) FIO Processor Kit	840010-L21
Intel® Pentium® G4000 series Processors	
HPE DL20 Gen9 Intel® Pentium® G4560 (3.5GHz/2-core/3MB/54W) FIO Processor Kit	871063-L21
HPE DL20 Gen9 Intel® Core™ i3-6300 (3.8GHz/2-core/4MB/51W) FIO Processor Kit	871061-L21
HPE ProLiant DL20 Gen9 Intel® Pentium® G4500 (3.5GHz/2-core/3MB/51W) FIO Processor Kit	840016-L21
HPE ProLiant DL20 Gen9 Intel® Pentium® G4400 (3.3GHz/2-core/3MB/54W) FIO Processor Kit	840018-L21

Memory Selection

To streamline the configuration process for HPE ProLiant Gen9 servers and to provide the best product availability, HPE recommends memory from the list located here: <http://www.hpe.com/products/recommend>.

Best product availability is limited to US, Canada, and Latin America at this time.

HPE Memory

Unbuffered DIMMs (UDIMMs) – 2400 MHz

NOTE: The following memory is supported by the E3-1200v6, i3-7000 and G4560 and G4600 processors only

HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Unbuffered Standard Memory Kit	862974-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2400 CAS-17-17-17 Unbuffered Standard Memory Kit	862976-B21

Unbuffered DIMMs (UDIMMs) – 2133 MHz

NOTE: The following memory is supported by the E3-1200v5, i3-6000 and G4500 and G4400 processors only

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	805671-B21
HPE 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	805669-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	819880-B21
HPE 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	805667-B21

NOTE: Depending on the processor selected these memory will run at 2133MHz.

HPE Optical Drives

HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive	726536-B21
HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive	726537-B21

HPE Drives

SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) RW 1yr Wty HDD	801888-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) RW 1yr Wty HDD	801884-B21
HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) RW 1yr Wty HDD	801882-B21

Core Options

SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives

HPE 4TB SATA 6G Entry 5.9K LFF (3.5in) RW 1yr Wty HDD	815635-B21
HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) RW 1yr Wty HDD	843266-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) RW 1yr Wty HDD	843268-B21
HPE 3TB SATA 6G Midline 7.2K LFF (3.5in) RW 1yr Wty HDD	843270-B21
HPE 500GB SATA 6G Midline 7.2K LFF (3.5in) RW 1yr Wty HDD	843264-B21

NOTE: These Entry drives will have lower performance and workload rating in comparison to HPE enterprise drives.

6G SATA SC Hot Plug LFF 7.2K (3.5-inch) Standard Drives

HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	858596-B21
HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	858594-B21

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HPE 10TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	857648-B21
HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861594-B21
HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	819203-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861750-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861752-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872491-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861678-B21
HPE 3TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861693-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872489-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861676-B21
HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861691-B21
HPE 500GB SATA 6G Midline 7.2k LFF (3.5in) SC 1yr Wty HDD	658071-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	846510-B21

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	872481-B21
HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872479-B21
HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD	781518-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870759-B21
HPE 900GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD	785069-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870757-B21
HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872477-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty HDD	759212-B21
HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD	781516-B21
HPE 450GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty HDD	759210-B21
HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870753-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872475-B21
HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty HDD	759208-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD	785067-B21

Core Options

HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e HDD	791034-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870765-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870763-B21
SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives	
HPE 600GB SAS 12G Enterprise 15K LFF (3.5in) SC 3yr Wty HDD	765424-B21
HPE 450GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty HDD	737394-B21
HPE 300GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty HDD	737261-B21
SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
HPE 10TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	857644-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861754-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861756-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872487-B21
HPE 3TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	846528-B21
HPE 1TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	846524-B21
HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872485-B21
HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	818365-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	818367-B21
HPE 8TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	819201-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	846514-B21
SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty HDD	655710-B21
6G SATA Hot Plug SFF (2.5-inch) SC 512e Drives	
HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765455-B21
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765453-B21
6G SATA Hot Plug LFF (3.5-inch) SC 512e Performance Drives	
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e HDD	793683-B21
SSD Selection	
To streamline the configuration process for HPE ProLiant Gen9 servers and to provide the best product availability, HPE recommends SSDs from the list located here: https://ssd.hpe.com/recommend .	
Best product availability is limited to US, Canada, and Latin America at this time.	
6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives	
HPE 1.6TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD	804631-B21
HPE 800GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD	804625-B21
HPE 200GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD	804613-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872352-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872348-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872344-B21
12G SAS Hot Plug SFF (2.5-inch) SC 512e Drives	
HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765466-B21
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765464-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e HDD	748387-B21
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty HDD	832514-B21
12G SAS Hot Plug SFF (2.5-inch) SC Read/Write Intensive Solid State Drives	

Core Options

HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872394-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty SSD	802891-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872392-B21
HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872390-B21
HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	802586-B21
HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	802582-B21
HPE 200GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	802578-B21
12G SAS Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives	
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872386-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872382-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872376-B21
HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872374-B21
12G SAS Hot Plug SFF (3.5-inch) SC Mixed Solid State Drives	
HPE 800GB SAS 12G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872378-B21
12G SAS Mainstream Endurance Hot Plug SFF (2.5-inch) Enterprise Mainstream H2 Solid State Drives	
HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	779176-B21
HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	779172-B21
HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	779168-B21
HPE 200GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	779164-B21
6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value M1 Solid State Drives	
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	764927-B21
6G SATA Hot Plug LFF (3.5-inch) Mixed Use SCC Solid State Drives	
HPE 200GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty SSD	804616-B21
HPE 800GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty SSD	804628-B21
HPE 1.6TB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty SSD	804634-B21
HPE 480GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872346-B21
HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872350-B21
6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives	
HPE 150GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869374-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869376-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869378-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869384-B21
HPE 1.6TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869386-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	871768-B21

Core Options

HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD 871770-B21

6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives

HPE 240GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty SSD 804590-B21

HPE 480GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD 869380-B21

HPE 1.6TB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD 869388-B21

6G SATA Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives

HPE 200GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804639-B21

HPE 400GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804665-B21

HPE 800GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804671-B21

HPE 1.2TB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804677-B21

HPE 400GB SATA 6G WI SFF SC DS SSD 872355-B21

HPE 800GB SATA 6G WI SFF SC DS SSD 872359-B21

HPE 1.6TB SATA 6G WI SFF SC DS SSD 872363-B21

6G SATA Hot Plug LFF (3.5-inch) SC Write Intensive Solid State Drives

HPE 200GB SATA 6G Write Intensive LFF (3.5in) SCC 3yr Wty SSD 804642-B21

HPE 400GB SATA 6G Write Intensive LFF (3.5in) SCC 3yr Wty SSD 804668-B21

HPE 800GB SATA 6G Write Intensive LFF (3.5in) SCC 3yr Wty SSD 804674-B21

HPE 1.2TB SATA 6G Write Intensive LFF (3.5in) SCC 3yr Wty SSD 804680-B21

HPE 400GB SATA 6G WI LFF SCC DS SSD 872357-B21

HPE 800GB SATA 6G WI LFF SCC DS SSD 872361-B21

HPE 1.6TB SATA 6G WI LFF SCC DS SSD 872365-B21

M.2 SSD

HP Dual 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers 777894-B21

HPE 120GB SATA 6G Read Intensive HHHL 3yr Wty M.2 Kit 788028-B21

HPE 340GB SATA 6G Read Intensive 3yr Wty M.2 Kit 835563-B21

HPE 340GB SATA 6G Read Intensive 3yr Wty Dual M.2 Kit 835565-B21

HPE DL20 Gen9 M.2 RA and Optical Disk Drive Power Cable Kit 816284-B21

NOTE: 816284-B21 cable kit is a mandatory option required to support M.2 SSDs.

NOTE: M.2 drives go in PCIe slot and use B140i SATA controller.

Hard Drive Blank Kits

HPE Large Form Factor Hard Drive Blank Kit 666986-B21

HPE Small Form Factor Hard Drive Blank Kit 666987-B21

HPE Networking

1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port 331T Adapter 647594-B21

NOTE: This networking card can NOT be selected with P440, H240, and P841. As an alternate solution the 4-port FlexibleLOM Adapter 629135-B21 can be chosen with P440, H240 or P841.

HPE Ethernet 1Gb 2-port 332T Adapter 615732-B21

HPE Ethernet 1Gb 2-port 361T Adapter 652497-B21

HPE Ethernet 1Gb 4-port 366T Adapter 811546-B21

NOTE: This networking card can NOT be selected with P440, H240, and P841. As an

Core Options

alternate solution the 4-port FlexibleLOM Adapter 665240-B21 can be chosen with P440, H240 or P841.

HPE PS1810-24G Switch J9834A

10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port 530SFP Adapter 652503-B21

HPE Ethernet 10Gb 2-port 530T Adapter 656596-B21

HPE Ethernet 10Gb 2-port 546SFP+ Adapter 779793-B21

HPE Ethernet 10Gb 2-port 557SFP+ Adapter 788995-B21

HPE Ethernet 10Gb 2-port 560SFP+ Adapter 665249-B21

HPE Ethernet 10Gb 2-port 561T Adapter 716591-B21

HPE Ethernet 10Gb 2-port 562SFP+ Adapter 727055-B21

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

25 Gigabit Ethernet adapters

HPE Ethernet 4x25Gb 1-port 620QSFP28 Adapter 817762-B21

FlexibleLOM Adapters

HPE Ethernet 1Gb 4-port 331FLR Adapter 629135-B22

HPE Ethernet 1Gb 4-port 366FLR Adapter 665240-B21

HPE FlexFabric 10Gb 2-port 533FLR-T Adapter 700759-B21

HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter 700751-B21

HPE FlexFabric 10Gb 4-port 536FLR-T Adapter 764302-B21

HPE Ethernet 10Gb 2-port 546FLR-SFP+ Adapter 779799-B21

HPE FlexFabric 10Gb 2-port 556FLR-SFP+ Adapter 727060-B21

HPE Ethernet 10Gb 2-port 560FLR-SFP+ Adapter 665243-B21

HPE Ethernet 10Gb 2-port 561FLR-T Adapter 700699-B21

Please see the related NIC QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.

HPE I/O Expansion Options

HPE DL20 Gen9 PCIe Low Profile Riser FIO Kit 854846-B21

HPE DL20 Gen9 Flexible LOM Riser Kit 811259-B21

HPE DL20 Gen9 GPU Enablement Kit 811271-B21

NOTE: It is mandatory to choose any of the above riser kit for CTO configurations.

HPE Power Supplies

HPE ProLiant Gen9 Essential Server Power Supplies - Non-Redundant

HPE DL20 Gen9 290W FIO Power Supply Unit Kit 816283-B21

NOTE: 290W PSU is a Non hot plug power supply.

NOTE: This FIO option can only be bought integrated in the server. It cannot be ordered as a standalone option after server purchase.

HPE ProLiant Gen9 Essential Server Power Supplies - Redundant

HPE 900W Standard AC 240VDC Power Input Module FIO Kit 828734-B21

NOTE: This Power supply supports both 100-240V AC and 240V DC.

HPE 900W Standard AC 240VDC RPS Power Backplane FIO Kit 828735-B21

NOTE: The backplane kit and the backplane cable kit (820306-B21) are mandatory with the power input module.

NOTE: This FIO option can only be bought integrated in the server. It cannot be

Core Options

ordered as a standalone option after server purchase.

HPE 900W Standard AC 240VDC Redundant Power Supply Kit 820792-B21

NOTE: This Redundant Power supply kit includes 2 power supply input modules and 1 backplane kit. Backplane cable kit (820306-B21) is mandatory for this option.

HPE 900W Standard AC 240VDC Power Input Module 775595-B21

NOTE: This part number can only be bought standalone and is for field integration only.

HPE 900W Standard AC 240VDC RPS Power Backplane 814835-B21

NOTE: This part number can only be bought standalone and is for field integration only.

NOTE: The backplane kit and the backplane cable kit (820306-B21) are mandatory with the power input module.

HPE DL20 Gen9 Redundant Power Supply Backplane Cable Kit 820306-B21

NOTE: This RPS backplane Cable kit is mandatory to be chosen along with 900W backplane.

NOTE: This Power supply supports both 100-240V AC and 240V DC.

NOTE: Supports Gold-level efficiency (92%) with a standard C14 inlet connector. No support for HPE Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.

NOTE: HPE 900W Gold (Redundant) AC 240VDC Power Input Module (775595-B21/ 828734-B21) must be used with Power Backplane (814835-B21/828735-B21).

NOTE: Each Redundant Power Supply Backplane can support up to two (2) power input modules.

NOTE: DL20 Gen9 Backplane cable kit is a mandatory option with the backplane for DL20 Gen9.

NOTE: Redundant AC Power Input Modules do not share power. Redundant AC Power Input Module #1 is the primary AC Power Input Module. Redundant AC Power Input Module #2 is the backup AC Power Input Module.

HPE Computation and Graphics Accelerators

HPE NVIDIA Quadro M2000 Graphics Accelerator P8Y48A

NOTE: 1 GPU supported per Server.

NOTE: 1 GPU Enablement kit 779611-B21 must be selected when adding a GPU option.

NOTE: Only the above listed Graphics cards are Hewlett Packard Enterprise standard supported options in this server.

NOTE: The NVIDIA Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012 R2.

NOTE: Please see the HPE Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HPE Power Advisor is located at:

<http://www.hpe.com/info/hppoweradvisor>

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Insight Software

HPE Insight Control

HPE Insight Control including 1yr 24x7 Technical Support and Updates 1-server LTU	C6N27A
HPE Insight Management Media Kit	C6N31A
HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO LTU	C6N36A

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HPE Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>

NOTE: For additional license options please see the [HPE Insight Control QuickSpecs](#).

Embedded Management

HPE iLO Advanced

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates 1-server LTU	512485-B21
HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity LTU	512486-B21
HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking LTU	512487-B21
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates 1-server LTU	BD505A
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates Flexible Quantity LTU	BD506A
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates Tracking LTU	BD507A
HPE iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE
HPE iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE

HPE iLO Essentials

HPE iLO Essentials including 3yr 24x7 Tech Support and Updates 1-server LTU	BD774A
HPE iLO Essentials including 1yr 24x7 Tech Support and Updates 1-server LTU	BD775A
HPE iLO Essentials including 3yr 24x7 Technical Support and Updates E-LTU	E6U61ABE
HPE iLO Essentials including 1yr 24x7 Technical Support and Updates E-LTU	E6U62ABE

HPE iLO Scale-Out

HPE iLO Scale-Out 3yr 24x7 Tech Support and Updates Flexible Quantity LTU	BD776A
HPE iLO Scale-Out including 3yr 24x7 Tech Support and Updates Flex Qty E-LTU	BD776AAE
HPE iLO Scale-Out including 3yr 24x7 Tech Support and Updates Tracking LTU	BD777A
HPE iLO Scale-Out 1yr 24x7 Tech Support and Updates Flexible Quantity LTU	BD778A
HPE iLO Scale-Out including 1yr 24x7 Tech Support and Updates Flex Qty E-LTU	BD778AAE
HPE iLO Scale-Out including 1yr 24x7 Tech Support and Updates Tracking LTU	BD779A

HPE Converged Infrastructure Management Software

HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE

Additional Options

High Performance Clusters	HPE Cluster Management Utility	
	HPE Insight Cluster Management Utility 1yr 24x7 Flexible LTU	QL803B
	HPE Insight Cluster Management Utility 3yr 24x7 Flexible LTU	BD476A
	HPE Insight Cluster Management Utility Media	BD477A
	NOTE: For additional license kits please see the HPE Insight Cluster Management Utility QuickSpecs.	
HPE Security	HPE Trusted Platform Module 2.0 Kit	745823-B21
	HPE Trusted Platform Module Option	488069-B21
	HPE 1U Security Bezel Kit	664918-B21
	NOTE: Quick Release Ear option kit (P/N 811254-B21) is mandatory for installing security bezel.	
	HPE DL20 Gen9 Quick Release Ear FIO Kit	811254-B21
NOTE: DL20 Gen9 ships with thumbscrew ear attachments (BTO and CTO) as standard. The Quick Release Ear kit needs to be purchased if you want to have a security bezel installed.		
HPE Storage Controllers	SAS Controllers	
	HPE Smart Array Controllers	
	HPE Smart Array P440/2GB FBWC 12Gb 1-port Int SAS Controller	820834-B21
	NOTE: The above SKUs include 96W Smart Storage Battery.	
	HPE Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller	726821-B21
	NOTE: The option requires a 96W Smart Storage Battery p/n 727258-B21.	
	HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller	761872-B21
	NOTE: The above SKUs include 96W Smart Storage Battery.	
	HPE Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller	726825-B21
	HPE Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller	726903-B21
	NOTE: P440 needs to be populated in slot 2 (Full Height).	
	HPE Smart Host Bus Adapters	
	HPE H240 12Gb 2-ports Int Smart Host Bus Adapter	726907-B21
	HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter	761873-B21
	HPE H241 12Gb 2-ports Ext Smart Host Bus Adapter	726911-B21
	NOTE: H240 needs to be populated in slot 2 (Full Height).	
	HPE Cable Options	
HPE DL20 Gen9 2LFF Mini SAS P440 Cable Kit	811279-B21	
HPE DL20 Gen9 4SFF Mini SAS P440 Cable Kit	811282-B21	
NOTE: One of the above cables is required to be selected depending on the combination of server and storage controller. Cable option kit descriptions include the right server and storage controller names.		
NOTE: FIO indicates that this option is only available as a factory installable option. Please select FIO option if you want the option to be factory installed.		
NOTE: All the server chassis (Mod-x) includes min-SAS cables required to connect drives to embedded B140i SATA controller or HBA240 controller (HBA240 is optional).		
Optional Software		
HP Secure Encryption per Svr Entitlement	C9A82AAE	
HPE SmartCache No Media 24x7 Technical Support 1-server LTU	D7S26A	

Additional Options

HPE SmartCache No Media 24x7 Technical Support Flexible LTU	D7S27A
HPE SmartCache No Media 24x7 Technical Support E-LTU	D7S27AAE
HPE Smart Array Secure Encryption/Data at Rest Encryption/per Server Entitlement E-LTU	Q2F26AAE

Optional Upgrades

HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers	727258-B21
--	------------

NOTE: This option is mandatorily required with HPE Smart Array controllers. One server can accommodate only 1 Smart Storage Battery that would suffice the requirement of all HPE Smart Array controllers.

Battery Holder

HPE DL20 Gen9 Smart Storage Battery Holder	822451-B21
--	------------

NOTE: This holder is mandatorily required with Smart Storage Battery.

HPE Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of Hewlett Packard Enterprise tape backup products <http://www.hpe.com/storage/BURACompatibility>.
NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.

Tape Drives

SAS Rack-Mount Tape Solutions

HPE StoreEver LTO-6 Ultrium 6250 Tape Drive in a 1U Rack Mount Kit	COL99A
HPE StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A
HPE StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in a 1U Rack Mount Kit	EJ014B
HPE StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive	EH958B
HPE StoreEver LTO-4 Ultrium 1760 SAS (1) in a 1U Rack Mount Kit	EH946C
HPE StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive	EH920B
HPE StoreEver 1U SAS Rack Mount Kit	AE459B

HPE DAT Autoloader

HPE StoreEver 1/8 G2 LTO-6 Ultrium 6250 Fibre Channel Tape Autoloader	COH19A
---	--------

HPE MSL2024 Tape Library

HPE StoreEver MSL2024 0-drive Tape Library	AK379A
--	--------

HPE MSL4048 Tape Library

HPE StoreEver MSL4048 0-drive Tape Library	AK381A
--	--------

HPE StoreEver MSL6480

HPE StoreEver MSL6480 Scaleable Expansion Module	QU626A
HPE StoreEver MSL6480 Scalable Base Module	QU625A

NOTE: Please see the [HPE StoreEver MSL6480 Tape Library QuickSpecs for Technical Specifications and additional information](#).

HPE Disk Backup

HPE RDX Removable Disk Backup System

HPE RDX+ 3TB USB 3.0 External Disk Backup System	P9L72A
HPE RDX 3TB USB 3.0 Internal Disk Backup System	P9L71A
HP RDX 2TB USB3.0 External Disk Backup System	E7X53B
HP RDX+ 1TB External Backup System	B7B69B
HP RDX+ 500GB External Backup System	B7B66B
HPE RDX+ External Docking System	C8S07B

Additional Options

HPE StoreOnce Backup systems

HPE StoreOnce 3100 8TB System	BB913A
HPE StoreOnce 3520 12TB System	BB922A
HPE StoreOnce 3540 24TB System	BB914A
HPE StoreOnce 5100 48TB System	BB915A

D2D Backup

HPE D3700 Enclosure	QW967A
HPE D3600 Enclosure	QW968A

NOTE: For the complete range of RDX drives and media see:

<http://www.hp.com/go/rdx>. For hardware and software compatibility of Hewlett

Packard Enterprise disk backup products see: <http://www.hp.com/storage/SPOCK>.

HPE Storage Options

Emulex Fibre Channel HBAs

HPE 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
HPE StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter	C8R39A

QLogic Fibre Channel HBAs

HPE 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A
HPE StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter	QW972A

HPE Data Center Racks

HPE Advanced Series Racks

HPE 48U 600mm x 1075mm Advanced Pallet Rack	H6J87A
HPE 48U 600mm x 1075mm Advanced Shock Rack	H6J88A
HPE 42U 600mm x 1075mm Advanced Pallet Rack	H6J65A
HPE 42U 600mm x 1075mm Advanced Shock Rack	H6J66A
HPE 42U 600mm x 1200mm Advanced Pallet Rack	H6J67A
HPE 42U 600mm x 1200mm Advanced Shock Rack	H6J68A
HPE 36U 600mm x 1075mm Advanced Pallet Rack	H6J77A
HPE 36U 600mm x 1075mm Advanced Shock Rack	H6J78A
HPE 22U 600mm x 1075mm Advanced Pallet Rack	H6J83A
HPE 22U 600mm x 1075mm Advanced Shock Rack	H6J84A
HPE 14U 600mm x 1075mm Advanced Shock Rack	H6J82A

NOTE: Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Enterprise Series Racks

HP 47U 600mm x 1200mm Enterprise Pallet Rack	BW913A
HP 47U 600mm x 1200mm Enterprise Shock Rack	BW914A
HP 42U 600mm x 1200mm Enterprise Pallet Rack	BW907A
HP 42U 600mm x 1200mm Enterprise Shock Rack	BW908A
HP 36U 600mm x 1075mm Enterprise Pallet Rack	BW895A
HP 36U 600mm x 1075mm Enterprise Shock Rack	BW896A
HP 42U 800mm x 1075mm Enterprise Pallet Rack	BW917A
HP 42U 800mm x 1075mm Enterprise Shock Rack	BW918A

NOTE: Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Power

HPE Basic Power Distribution Units (PDU)

Additional Options

Distribution Units (PDUs)	HPE Basic 1.9kVA/L5-20P 16A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU	H5M54A
	HPE Basic 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU	H5M56A
	HPE Basic 2.8kVA/L5-30P 24A/120V Outlets (18) 5-20R/Vertical NA/JP PDU	H5M55A
	HPE Basic 4.9kVA/60320 C20 Detachable 16A/230V Outlets (20) C13/Vertical WW PDU	H5M57A
	HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (20) C13/Vertical NA/JP PDU	H5M58A
	HPE Basic 7.3kVA/60309 5-wire 32A/230V Outlets (20) C13/Vertical INTL PDU	H5M68A
	HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13/Vertical NA/JP PDU	H5M61A
	HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU	H5M59A
	HPE Basic 7.3kVA/60309 3-wire 32A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU	H5M70A
	HPE Basic 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (6) C19/Vertical NA PDU	H5M60A
	HPE Basic 11kVA/60309 63A 3-wire 48A/230V Outlets (30) C13 (6) C19/Vertical INTL PDU	H5M71A
	HPE Basic 9.2kVA/50A Terminal Block 40A/230V Outlets (30) C13 (6) C19/Vertical WW PDU	H5M75A
	HPE Basic 3Ph 5.7kVA/ L21-20P 16A/120-208V Outlets (24) C13 (3) 5-20R/Vertical NA/JP PDU	H5M63A
	HPE Basic 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (24) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU	H5M64A
	HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU	H5M62A
	HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU	H5M72A
	HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (36) C13 (6) C19/Vertical INTL PDU	H5M73A
	HPE Basic 3Ph 11kVA/60309 16A/240V Outlets (36) C13 (6) C19/Vertical NA PDU	H5M67A
	HPE Basic Modular 2.8kVA/L5-30P 24A/120V Outlets (4) C19/Horizontal NA/JP PDU	252663-D71
	HPE Basic Modular 4.9kVA/L6-30P 24A/208V Outlets (4) C19/Horizontal NA/JP Core Only PDU	252663-D74
	HPE Basic Modular 8.3kVA/CS8265C 40A/208V Outlets (4) C19/Horizontal NA/JP PDU	252663-D75
	HPE Basic Modular 7.3kVA/60309 3-wire 32A/230V Outlets (4) C19/Horizontal INTL Core Only PDU	252663-B33
	HPE Basic Modular 9.2kVA/60309 63A 3-wire 40A/230V Outlets (4) C19/Horizontal INTL PDU	252663-B34
	HPE Basic Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF512A
	HPE Basic Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU	AF513A
	HPE Basic Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF519A
	HPE Basic Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF511A
	HPE Basic Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF518A
	HPE 800VA - 277V Input / 230V Output NA Rack Mount Transformer	H3X09A

NOTE: Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#)

Additional Options

for information on additional options and product specifications.

HPE Metered Power Distribution Units (PDU)

HPE Metered 2.8kVA/L5-30P 24A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU	D9N43A
HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU	D9N46A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Horizontal NA/JP PDU	D9N44A
HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (16) C13/Vertical WW PDU	D9N45A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Vertical NA/JP PDU	G9Z05A
HPE Metered 7.3kVA/60309 3-wire 32A/230V Outlets (12) C13/Vertical INTL PDU	G9Z06A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU	D9N47A
HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (20) C13 (4) C19/Vertical INTL PDU	D9N48A
HPE Metered 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (3) C19/Vertical NA/JP PDU	D9N51A
HPE Metered 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (18) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU	D9N53A
HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (18) C13 (3) C19/Vertical INTL PDU	D9N55A
HPE Metered 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (3) C19/Vertical NA PDU	D9N49A
HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlet (32) C13 (4) C19/Vertical INTL PDU	D9N50A
HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (30) C13 (3) C19/Vertical INTL PDU	D9N57A
HPE Metered 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	D9N58A
HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (30) C13 (3) C19/Vertical NA/JP PDU	D9N61A
HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	D9N62A
HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (24) C13 (3) C19/Vertical NA/JP PDU	D9N54A
HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	D9N59A
HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	G9Z07A
HPE Metered 3Ph 19.9kVA/L22-30P 24A/277V Outlets (30) RF-203P-HP/Vertical NA PDU	D9N63A
HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlet (30) C13 (3) C19/Vertical INTL PDU	D9N56A
HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C13 (12) C19/Vertical INTL PDU	D9N60A
HPE Metered 3Ph 22kVA/60309 5-wire WT 32A/230V Outlets (12) C13 (12) C19/Vertical INTL PDU	G9Z08A
HP Environmental Sensor for Remote Monitored and Managed PDUs	E2D53A

NOTE: Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on additional options and product specifications.

HPE Intelligent Power Distribution Unit (PDU)

Additional Options

HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF520A
HPE Intelligent Modular 8.3kVA/CS8265C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF521A
HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF522A
HPE Intelligent Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V (6) C19/Horizontal NA/JP PDU	AF523A
HPE Intelligent Modular 3Ph 17.3kVA/60309 30A 5-wire 24A/240V (6) C19/Horizontal NA/JP PDU	AF901A
HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF525A
HPE Intelligent Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU	AF526A
HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF527A
HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 60A 4-wire 48A/208V (12) C19/Horizontal NA/JP PDU	AF535A
HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C19/Horizontal INTL PDU	AF538A
HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU	AF531A
HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU	AF532A
HPE Intelligent Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF533A
HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU Kit	AF534A
HPE 5xC13 Intelligent PDU Extension Bar G2 Kit	AF547A
HPE 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar	AF528A
NOTE: Please see the HPE Intelligent Power Distribution Unit (PDU) QuickSpecs for information on additional options and product specifications.	
HPE Metered and Switched Power Distribution Units (PDU)	
HPE Metered Switched 2.8kVA/L5-30P 24A/120V Outlets (24) 5-20R /Vertical NA/JP PDU	H8B48A
HPE Metered Switched 3.6kVA/60320 C20 Detachable 16A/230V Outlets (7) C13 (1) C19/Vertical WW PDU	H8B49A
HPE Metered Switched 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU	H8B50A
HPE Metered Switched 7.3kVA/60309 3-wire 32A/230V Outlets (20) C13 (4) C19/Vertical INTL PDU	H8B51A
HPE Metered Switched 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (6) C19/Vertical NA/JP PDU	H8B52A
HPE Metered Switched 3Ph 8.6kVA/L21-30P 24A/208V Outlets (20)C13 (3)C19 (1)5-20R/Vertical NA/JP PDU	H8B53A
HPE Metered Switched 3Ph 11kVA/60309 5-wire 16A/230V Outlets (21) C13 (3) C19/Vertical INTL PDU	H8B54A
HPE Metered Switched 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	H8B55A
HPE Metered Switched 3Ph 17.3kVA/60309 4-wire 48A/208V Outlets (12) C13 (12)	H8B56A

Additional Options

C19/Vertical NA/JP PDU

NOTE: Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on additional options and product specifications.

NOTE: To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

HPE Rack Mount Consoles, KVM Switches, and Keyboards

HPE Location Discovery Services

HPE Location Discovery Services LCD8500 Kit TL052A

NOTE: Please see the [HPE Location Discovery Services QuickSpecs](#) for information on additional options and product specifications.

HPE Rack Mount Consoles

HP LCD8500 1U US Rackmount Console Kit	AF630A
HP LCD8500 1U UK Rackmount Console Kit	AF631A
HP LCD8500 1U DE Rackmount Console Kit	AF632A
HP LCD8500 1U FR Rackmount Console Kit	AF633A
HP LCD8500 1U JP Rackmount Console Kit	AF642A
HP LCD8500 1U RU Rackmount Console Kit	AF643A
HP LCD8500 1U INTL Rackmount Console Kit	AF644A
HP LCD8500 1U US TAA Rackmount Console Kit	AF645A

HPE KVM Switches

HP 0x1x8 G3 KVM Console Switch	AF651A
HP 0x2x16 G3 KVM Console Switch	AF652A
HP TAA 0x2x16 G3 KVM Console Switch	AF653A
HP USB Remote Access Key for G3 KVM Console Switches	AF650A
HP KVM Console USB Interface Adapter	AF628A
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A
HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter	AF629A
HP 1x4 USB/PS2 KVM Console Switch	AF611A
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A
HPE KVM Console USB/Display Port Interface Adapter	AF654A
HPE KVM Console USB 8-pack Interface Adapter	AF655A

NOTE: To learn more, please visit the [HPE KVM Switches web page](#).

HPE USB Keyboard and Mouse

HPE USB US Keyboard/Mouse Kit	631341-B21
HPE USB UK Keyboard/Mouse Kit	631344-B21
HPE USB FR Keyboard/Mouse Kit	631346-B21
HPE USB ES Keyboard/Mouse Kit	631348-B21
HPE USB DE Keyboard/Mouse Kit	631358-B21
HPE USB JP Keyboard/Mouse Kit	631360-B21
HPE USB IT Keyboard/Mouse Kit	631362-B21
HPE USB CN Keyboard/Mouse Kit	631364-B21
HPE USB AE Keyboard/Mouse Kit	638212-B21

Additional Options

HPE USB RU Keyboard/Mouse Kit	638214-B21
HPE USB IN Keyboard/Mouse Kit	672097-D63
HPE USB AP/INTL Keyboard/Mouse Kit	672097-373
HPE USB INTL Keyboard/Mouse Kit	672097-B33
HPE USB PT Keyboard/Mouse Kit	672097-133
HPE USB TR Keyboard/Mouse Kit	672097-143
HPE USB CZ Keyboard/Mouse Kit	672097-223
HPE USB FI Keyboard/Mouse Kit	672097-353
HPE USB SE Keyboard/Mouse Kit	672097-103
HPE USB CH Keyboard/Mouse Kit	672097-113
HPE USB KR Keyboard/Mouse Kit	672097-KD3
Rail Kits	
HP 1U Short Friction Rail Kit	775612-B21
HPE Other Options	
HPE Rack LED Light Kit	BW939A
HP Kit LCD 1.83m Latch Display Port Cable	G7T29A
HP ConvergedSystem Door Branding Kit	TK815A
HP ConvergedSystem Rack Light Kit	TK816A
HP ConvergedSystem Rack Side Panel 1075mm Kit	TK817A

HPE Uninterruptible Power Systems (UPS) HPE DirectFlow Three Phase UPS

HPE Uninterruptible Power Systems (UPS)

Power Unit (1U UPS)

HPE R12000 DirectFlow - 1U Rackmount Uninterruptible Power System	G9Y75A
HPE R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System	AF478A
HPE RP12000/3 12000VA Three Phase INTL 6U Rackmount Uninterruptible Power System	AF437A

Input/Output Module Options for 1U UPS

HPE 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 Input/Output Module	AF488A
HPE 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module	AF489A
HPE 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated Input/Output Module	AF490A
HPE 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module	AF491A
HPE 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	AF492A
HPE 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	G9Y76A
HPE DirectFlow UPS Management Card	AF493A

Power Unit (2U UPS)

HPE R18000 DirectFlow - 2U Rackmount Uninterruptible Power System	AF479A
---	--------

Input/Output Module Options for 2U UPS

HPE 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309 Input/Output Module	AF483A
HPE 30A 380 Volt Three Phase China R18000 DirectFlow UPS Unterminated Input/Output Module	AF485A

Additional Options

HPE 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF486A
HPE 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF487A
HPE 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	D9Q02A
HPE 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module	AF484A

NOTE: All Input/Output Modules support dual output outlets except the AF484A.

Battery Pack Options

HPE DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack	AF480A
HPE DirectFlow UPS - 3U Rackmount VRLA Battery Pack	AF482A
HPE WW DirectFlow Secondary Battery Cable	AF497A

NOTE: Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on additional options and product specifications.

HPE Tower UPS

HPE T750 G4 UPS Models

HPE T750 G4 NA/JP Uninterruptible Power System	J2P85A
HPE T750 G4 INTL Uninterruptible Power System	J2P88A

HPE T1000 G4 UPS Models

HPE T1000 G4 NA/JP Uninterruptible Power System	J2P86A
HPE T1000 G4 INTL Uninterruptible Power System	J2P89A

HPE T1500 G4 UPS Models

HPE T1500 G4 NA/JP Uninterruptible Power System	J2P87A
HPE T1500 G4 INTL Uninterruptible Power System	J2P90A

HPE Rack-mountable UPS

HPE R/T2200 G4 UPS Models

HPE R/T2200 G4 NA/JP Uninterruptible Power System	J2R00A
---	--------

HPE R/T3000 G4 UPS Models

HPE R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System	J2R01A
HPE R/T3000 G4 High Voltage NA/JP Uninterruptible Power System	J2R02A
HPE R/T3000 G4 High Voltage INTL Uninterruptible Power System	J2R04A

R1500 G4 Models

HPE R1500 G4 NA Uninterruptible Power System	J2Q99A
HPE R1500 G4 JP/TWN Uninterruptible Power System	J2R05A
HPE R1500 G4 INTL Uninterruptible Power System	J2R03A

R7000 Uninterruptible Power System (UPS)

HPE R7000 4U 50A High Voltage NA/JP Uninterruptible Power System	AF462A
HPE R7000 4U IEC-32A High Voltage INTL Uninterruptible Power System	AF463A

R5000 Uninterruptible Power System (UPS)

HPE R5000 3U L630 High Voltage NA/JP Uninterruptible Power System	AF460A
HPE R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power System	AF461A

NOTE: Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on additional options and product specifications.

HPE UPS Options

Additional Options

HPE R/T2200 G4 Extended Runtime Module	J2R09A
HPE R/T3000 G4 Extended Runtime Module	J2R10A
HPE 2U Rack/Tower UPS Shipping Kit	L4Q11A

NOTE: To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

HPE USB and SD Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD Mainstream Flash Media Kit	700139-B21
HPE 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
HP Dual 8GB microSD Enterprise Midline USB Kit	741279-B21

HPE Support Services

Installation & Start-up Services

HPE Installation ML/DL Series 10 Service	U7WZ5E
HPE Startup ML/DL Series 10 Service	U7WZ7E

Foundation Care

HPE 3 year Foundation Care Next business day DL20 Gen9 Service	H1AH3E
HPE 3 year Foundation Care Next business day with DMR DL20 Gen9 Service	H1AH4E
HPE 3 year Foundation Care 24x7 DL20 Gen9 Service	H1AH9E
HPE 3 year Foundation Care 24x7 with DMR DL20 Gen9 Service	H1AJ0E
HPE 3 year Foundation Care 24x7 with CDMR DL20 Gen9 Service	H1AP0E
HPE 3 year Foundation Care Next business day with CDMR DL20 Gen9 Service	H1AN7E

Proactive Care

HPE 3 year Proactive Care 24x7 DL20 Gen9 Service	H1AJ1E
HPE 3 year Proactive Care 24x7 with DMR DL20 Gen9 Service	H1AJ2E
HPE 3 year Proactive Care 24x7 with CDMR DL20 Gen9 Service	H1AP1E

Memory

HPE Standard Memory UDIMMs has passed the rigorous Hewlett Packard Enterprise qualification and testing processes. The memory subsystem in this server supports UDIMMs. The server supports single-rank and dual-rank DDR4 UDIMMs operating at up to 2133 MHz DIMM speeds.

Memory Population guidelines The server supports two channels per processor with two DIMMs per channel for a total of four DIMMs per DL20 Gen9 Server.

General Memory Population Rules and Guidelines:

- . Only UDIMMs are supported on DL20 Gen9. No support for RDIMMs and LRDIMMs.
- . All the channels in a system run at the fastest common frequency.
- . Both single DIMM per channel and dual DIMMs per channel are supported at 2133MHz.

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E3-1200v5 Series Processor Family

Memory Bandwidth and Capacity				
[DIMM Type]	Unbuffered with ECC DIMMs (UDIMMs)			
HPE SKU P/N	805667-B21	819880-B21	805669-B21	805671-B21
DIMM Rank	Single Rank	Single Rank	Dual Rank	Dual Rank
DIMM Capacity	4GB	8GB	8GB	16GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
DIMM Native Speed (MT/s)	2133	2133	2133	2133
SLOTS THAT CAN BE POPULATED				
4 slot servers	4	4	4	4
MAXIMUM CAPACITY (GB)				
	16	32	32	64
POPULATED DIMM SPEED (MT/s)				
1 DIMM Per Channel	2133	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133	2133
3 DIMM Per Channel		n/a		

Memory

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E3-1200v6 Series Processor Family

[DIMM Type]	Unbuffered with ECC DIMMs (UDIMMs)	
HPE SKU P/N	862974-B21	862976-B21
DIMM Rank	Single Rank	Dual Rank
DIMM Capacity	8GB	16GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V
DIMM Native Speed (MT/s)	2400	2400
SLOTS THAT CAN BE POPULATED		
4 slot servers	4	4
MAXIMUM CAPACITY (GB)		
	32	64
POPULATED DIMM SPEED (MT/s)		
1 DIMM Per Channel	2400	2400
2 DIMM Per Channel	2400	2400
3 DIMM Per Channel	n/a	n/a

DIMM slot and configuration diagram

UDIMM maximum configuration (1 CPU model)

Population order; start with "A" first, "B" second, "C" third, etc.

CPU 1		
	Slot #	Population order
Chnl 2	1	B
	2	D
CPU 1		
	Slot #	Population order
Chnl 1	3	A
	4	C

Memory


Memory Speed by Processor Model	Processor Models	Supported Memory Speeds
	E3-1220v5, E3-1225v5, E3-1230v5, E3-1240v5, E3-1270v5, E3-1280v5, E3-1260Lv5, E3-1240Lv5, i3-6100, i3-6300, G4500, G4400	2133MT/s
	E3-1220v6, E3-1225v6, E3-1230v6, E3-1240v6, E3-1270v6, E3-1280v6, i3-7100, i3-7300, G4560, G4600	2400MT/s

Standard and Maximum Memory Capacity (Pre-configured Models)	Pre-Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
	G4400	4GB (1x4GB)	52GB (3x16GB, 1x4GB)	64GB (4x16GB)
	E3-1240v5	8GB (1x8GB)	56GB (3x16GB, 1x8GB)	64GB (4x16GB)
	E3-1220v5	8GB (1x8GB)	56GB (3x16GB, 1x8GB)	64GB (4x16GB)
	G4560	8GB (1x8GB)	56GB (3x16GB, 1x8GB)	64GB (4x16GB)
	E3-1220v6	8GB (1x8GB)	56GB (3x16GB, 1x8GB)	64GB (4x16GB)
	E3-1240v6	16GB (1x16GB)	64GB (4x16GB)	64GB (4x16GB)

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values.


- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB

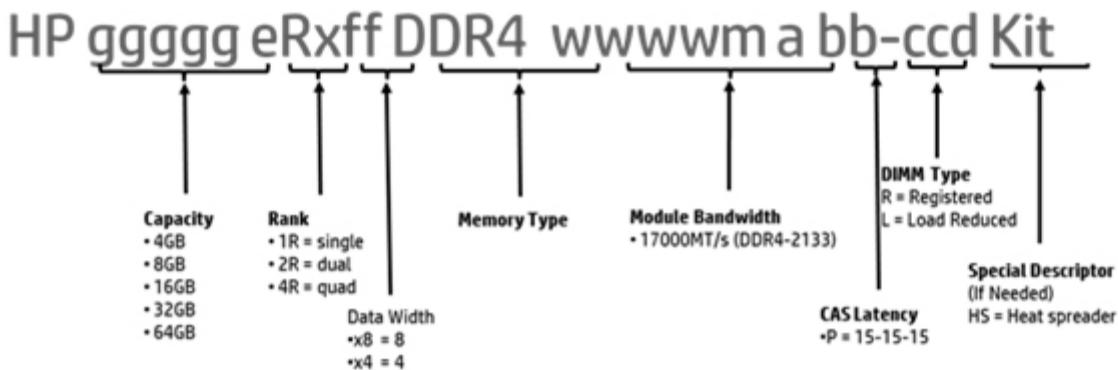


Storage



1-4 4 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays



1-2 2 x LFF SATA/SAS/SSD Hot Pluggable and Non hot Pluggable Hard Drives Bays



1-2 2 x LFF SATA Non hot Pluggable Hard Drives Bays

Technical Specifications

System Unit	Dimensions (H x W x D)	4 SFF - 1.70 x 17.11 x 15.05 inches (4.32 x 43.46 x 38.22 cm) 2 LFF - 1.70 x 17.11 x 15.05 inches (4.32 x 43.46 x 38.22 cm)
	Weight (approximate)	Non hot Plug 2 LFF fully loaded 17.37lb (7.88kg) (all hard drives, power supplies, and processors installed) Hot Plug 2LFF fully loaded 17.41lb (7.9kg) (one hard drive, power supply, and processor installed)
290W Non-hot Plug Power Supply		
Input Requirements	Range Input Voltage	100 to 240 VAC
	Rated Input Current	5.5 A max (at 100 VAC)
	Rated Input Frequency	50 to 60 Hz
	Rated Input Power	550 W (at 100 VAC)
BTU Rating	Maximum	1130 BTU per hr (at 115 VAC) 1126 BTU per hr (at 230 VAC)
	Power Specifications	To review typical system power ratings use the Power Advisor which is available via the online tool located at: http://www.hpe.com/info/hppoweradvisor - Click on the system of interest. Example: DL20 Gen9- Follow the instructions of the next screens.
Power Supply Output	Rated Steady-State Power	290 W Max
	Maximum Peak Power	366 W within 10 seconds
900W Redundant Power Supply		
Input Requirements	Rated Input Voltage	100 to 127 VAC 200 to 240VAC
	Rated Input Frequency	50 to 60 Hz
	Rated Input Current	6.3 A at 100 V AC 4.9 A at 200 V AC
	Maximum rated input power	619 W at 100 VAC 976 W at 200 VAC
	BTUs per hour non redundant	2112 at 100 VAC 3329 at 200 VAC
	Power Specifications	To review typical system power ratings use the Power Advisor which is available via the online tool located at: http://www.hpe.com/info/hppoweradvisor - Click on the system of interest. Example: DL20 Gen9- Follow the instructions of the next screens.
	Power Supply Output	Rated Steady-State Power 550 W at 100 VAC to 127 VAC input 900 W at 200 VAC to 240 VAC input Maximum Peak Power 550 W at 100 VAC to 127 VAC input 900 W at 200 VAC to 240 VAC input
System Inlet Temperature	Standard Operating Support	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F)

Technical Specifications

		per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
	Extended Ambient Operating Support	For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hpe.com/servers/ashrae System performance may be reduced if operating in the extended ambient operating range or with a fan fault. NOTE: Supports A3 extended ambient.
Relative Humidity	Non-operating	-30°C to 65°C (-22°F to 149°F)
	Operating	Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.
(non-condensing)	Non-operating	5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature.
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise		Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).
		Idle
	LWAd	Entry 3.7 B Base 3.8 B Performance 3.4B
	LpAm	Entry 20.0 dBA Base 20.0 dBA Performance 18.0 dBA
		Operating
	LWAd	Entry 3.7 B Base 4.7 B Performance 5.6 B

Technical Specifications

		LpAm	Entry 20.0 dBA Base 30.0 dBA Performance 34.0 dBA	
Emissions Classification (EMC)		FCC Rating	Class A	
		Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1	
<p>NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.</p> <p>NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.</p> <p>NOTE: The above power supply also supports 240VDC.</p>				
HPE Dynamic Smart Array B140i Controller	Number of PCI links	Four		
	PCI link rate	4Gb/s		
	Storage protocol support	SATA		
	SAS/SATA peak data transfer rate	6Gb/s		
	Number of SAS/SATA links	10 links		
	SAS/SATA connectivity	2x4 connectors; 2x1 connectors		
	Expander support	No		
	Drives supported (max)	Up to 10 Internal Drives		
	RAID support	0, 1, 10, 5 SATA		
	Software management	HPE SSA, SMH, SIM		
	Warranty	Server warranty		
	HPE Secure Encryption license	Not Supported		
	HPE SmartCache License	Not Supported		
	HPE Smart Storage Administrator	Supported		
HPE Ethernet 1Gb 2-port 332i Adapter	Network Interface Compatibility	10Base-T/100Base-TX/1000Base-TX IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX Energy Efficient Ethernet (EEE) compliant with IEEE Std 802.3az (default is disabled)		
	Data Transfer Method Controller	PCI Express, two lanes (x2) BCM5720		
	Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s per port, 20 Mb/s Combined	
		10Base-T (Full-Duplex)	20 Mb/s per port, 40 Mb/s Combined	
		100Base-TX (Half-Duplex)	100 Mb/s per port, 200 Mb/s Combined	
		100Base-TX (Full-Duplex)	200 Mb/s per port, 400 Mb/s Combined	

Technical Specifications

	1000Base-TX (Half-Duplex)	1000 Mb/s per port, 2000 Mb/s Combined
	1000Base-TX (Full-Duplex)	2000 Mb/s per port, 4000 Mb/s Combined
Connector	Four RJ-45	
Cable Support	10 Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)
	10/100/1000 Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life product return, trade-in, and recycling programs, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

<http://www.hpe.com/recycle>

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

<http://www.hpe.com/recycle>

Summary of Changes

Date	Version History	Action	Description of Change
5-Jun-2017	From Version 19 to 20	Added	Added new Solid State Drives to the HPE Drives section.
8-May-2017	From Version 18 to 19	Added	New Intel Pentium Core i3 and E3-1200v6 processors were added. Added new 2400 MT/s UDIMMs. Added support for ClearOS. Added new Pre-Configured Models.
		Changed	Processor, Memory, Operating Systems and Virtualization Software Support for ProLiant Servers, and Graphics under Standard Features were revised. HPE Processors, HPE Memory, HPE Drives, HPE Computation and Graphics Accelerators, HPE Data Center Racks, and Memory were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
3-Apr-2017	From Version 17 to 18	Changed	HPE Processors section was revised.
27-Mar-2017	From Version 16 to 17	Added	Added new Hard Drives.
17-Feb-2017	From Version 15 to 16	Changed	HPE Memory section under Core Options was revised.
13-Feb-2017	From Version 14 to 15	Added	Added new HDD and SSD offerings to the HPE Drives section.
09-Dec-2016	From Version 13 to 14	Changed	Smart Buy models section in the NA version was revised.
28-Nov-2016	From Version 12 to 13	Added	Added new Hard Drives offering. Added new M2000 GPU option.
		Changed	Maximum Internal Storage, Graphics, HPE Computation and Graphics Accelerators, and HPE Disk Backup were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
28-Oct-2016	From Version 11 to 12	Removed	Obsolete Hard Drives were removed from the QuickSpecs.
26-Sep-2016	From Version 10 to 11	Added	Added new LFF 10TB SATA drives offering.
		Changed	Maximum Internal Storage and Pre-configured Models were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
15-Aug-2016	From Version 9 to 10	Changed	HPE Networking section was revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
10-Jun-2016	From Version 8 to 9	Removed	HPE Dual 32GB microSD Enterprise Midline USB Kit was removed from the QuickSpecs.
6-Jun-2016	From Version 7 to 8	Added	Added new HDD offering to the HPE Drives section.
		Changed	HPE Networking, HPE Converged Infrastructure Management Software, and HPE Disk Backup were revised.
6-May-2016	From Version 6 to 7	Changed	Energy Star certification in Pre-Configured Models section was revised.
8-Apr-2016	From Version 5 to 6	Changed	HPE Processors section was revised.

Summary of Changes

31-Mar-2016	From Version 4 to 5	Added	Added new HPE Non-hot Plug Entry drives and Hot plug standard drives. Added new 8Gb and 16Gb Fiber Channel HBA support. Added new TPM 2.0 security module.
		Changed	Maximum Internal Storage, Graphics, Embedded Management, Security, Service and Support, Pre-configured Models, Power Supplies, and Storage Options sections were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
16-Feb-2016	From Version 3 to 4	Added	New HDD offering was added to HPE Drives.
		Changed	HPE Data Center Racks, HPE Power Distribution Units (PDUs), and HPE Uninterruptible Power Systems (UPS) were revised.
12-Jan-2016	From Version 2 to 3	Changed	Upgradeability and HPE Power Supplies were revised.
17-Dec-2015	From Version 1 to 2	Added	Smart Buy models were added to the NA version.
		Changed	Power Supply, Upgradeability, and Technical Specifications were revised.



hpe.com/qref/dl20gen9



Sign up for updates

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04834947 - 15474 - Worldwide - V20 - 5-June-2017

